

LED Flush Mount

 Ceiling mounted • Damp location listed **PROGRESS LED**


P350101-020-30

Description:

The 13-1/2 inch LED Flush mount offers traditional form factor for ambient illumination. The etched glass dominates the design with its distinctive and sculptural bowl. The elegant glass is paired with a metallic frame in a Antique Bronze finish.

Specifications:

- Antique Bronze (-020) (painted)
- Steel Construction
- Etched Glass globe
- LED Module is replaceable (part # 93074253)
- LED Flush mount offers traditional form factor for ambient illumination
- The etched glass dominates the design with its distinctive and sculptural bowl
- Popular Antique Bronze finish
- The elegant glass is paired with a metallic frame
- A natural choice for closets, hallways and smaller areas within the home
- Features 25-watt integrated LED to deliver energy savings and reduce long-term maintenance costs
- 1770 lumens, 70 lumens per watt (source)
- 3000K color temperature, 90CRI
- ENERGY STAR certified
- California JA8 certified.
- Dimmable to 10% brightness (See Dimming Notes)
- Ceiling pan covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	25w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1770/70 (LM-82)
Lumens/LPW (Delivered)	1446/56.9 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Warranty	5 year limited warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

Images:



Dimensions:

Diameter: 13-1/2"

Height: 4-1/2"

Glass

Width: 10"

Height: 3-1/4"

Photometrics:

P350101-020-30

ELECTRICAL DATA	P350101-020-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.208 A
Input Power	25
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

*See Dimming Notes for more information

P350101-020-30


LED Light Engine: 3000 K 90 CRI
 System Wattage: 25
 Fixture delivered lumens: 1446
 Fixture Efficacy: 56.9
 Spacing Criteria: 1.23

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	428	
5	427	40
15	408	115
25	374	173
35	328	206
45	274	212
55	216	193
65	157	155
75	104	111
85	62	69
90	47	
95	34	38
105	17	19
115	9	9
125	5	4
135	3	1
145	0	0
155	0	0
165	0	0
175	0	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	328	24.4
0-40	534	39.7
0-60	938	69.8
0-90	1273	94.7
90-120	65	4.9
90-130	70	5.2
90-150	71	5.3
90-180	71	5.3
0-180	1344	100.0

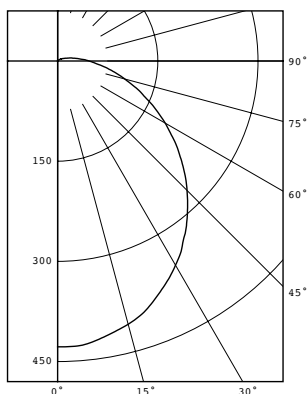

Test 17.02225 Test Date 08/16/17

P350101-020-30**Dimming Notes:**

P350101 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Cooper Devine AL DAL06P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.