

## Z-1030 LED

Wall Mounted • Wet Location Listed PROGRESS LED



### Description:

A modern medium outdoor LED sconce with an architectural-inspired open linear frame and clear glass diffuser. Finished in Black.


### Specifications:

- Clear glass Diffuser
- A modern outdoor LED sconce.
- LED source provides energy efficient source with low maintenance and cost savings benefits
- Features an architectural-inspired open linear frame and clear glass diffuser
- Finished in Black
- 624 lumens 66 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Meets California Title 24 - JA8 - 2016.
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" recessed outlet box: 4.75 in W., 1 in ht., 4.75 in depth
- Mounting strap for outlet box included
- 6 in of wire supplied

### Performance:

|                        |                                     |
|------------------------|-------------------------------------|
| Number of Modules      | 1                                   |
| Input Power            | 9 W                                 |
| Input Voltage          | 120 V                               |
| Input Frequency        | 60 Hz                               |
| Lumens/LPW (Source)    | 624/66 (LM-82)                      |
| Lumens/LPW (Delivered) | 309/32.9 (LM-79)                    |
| CCT                    | 3000 K                              |
| CRI                    | 90+                                 |
| Life (hours)           | 60000 (L70/TM-21)                   |
| EMI/RFI                | Meets FCC Title 47, Part 15 Class B |
| Max. Operating Temp    | 30° C                               |
| Warranty               | 5-year Limited Warranty             |
| Labels                 | cCSAus Wet Location Listed          |
|                        | ENERGY STAR® qualified              |
|                        | Meets California Title 24 JA8-2016  |



## P560056-031-30

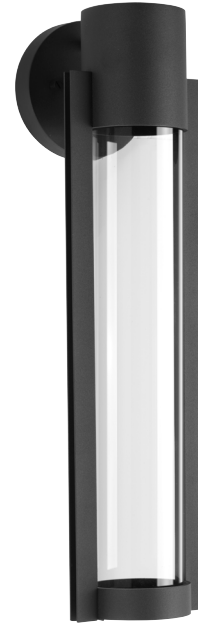

### Dimensions:

Width: 5-1/8 in  
Height: 20 in  
Depth: 5-3/4 in  
H/CTR: 2-1/4 in

Clear glass Diffuser  
Width: 3-1/8 in  
Height: 16-5/16 in

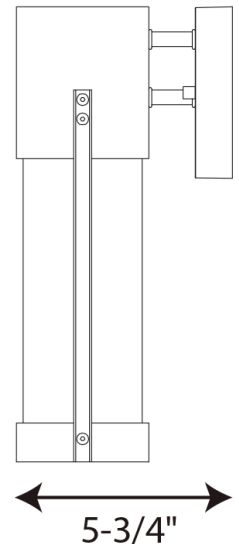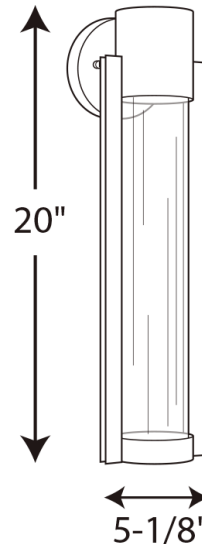

**Dimming Notes:**

---

P560056-031-30 is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

**Dimming Controls:**

---

Lutron\_Diva DVELV-300P

Lutron\_Nova T NTELV-300

Lutron\_Caseta

Lutron\_Ariadni AY-600P

Leviton\_Illumatech IPI06-1LZ

Leviton\_SureSlide 6672

Lutron\_Ariadni AYCL-153P

Lutron\_Skylark Contour CTCL-153P

Lutron\_Diva DVCL-153P

Lutron\_Toggler TGCL-153P

Lutron\_Maestro MACL-153M

Lutron\_Ariadni AYLV-600P

Lutron\_Nova T NTLV-600

Lutron\_Maestro MAELV-600

Lutron\_spacer/system SPSELV-600

Leviton\_Renoir II AWRMG-EAW

Lutron\_Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

**P560056-031-30**