

## Two-Light Bath

 Wall mounted • Damp location listed 

### Description:

Tubular etched glass shades pop against a geometric back plate to create Colonnade, an LED bath and vanity collection. Modern style and continuous illumination are ideal for a variety of bath and vanity settings - including Mid-Century and Luxe. LED source features 3000K and 90 CRI benefits, as well as a lifespan of more than 42,000 hours. Two-Light Bath in a Polished Chrome finish.

### Specifications:

- Polished Chrome (-015) (plated)
- Steel construction
- Etched White Glass Cylindrical
- Tubular etched glass shades pop against a geometric back plate in Colonnade
- 2-light 19-watt LED bath fixture
- Colonnade is an LED bath and vanity collection
- An integrated LED source provides a variety of energy and cost savings benefits for the homeowner
- Measures 13 1/4"W x 7 1/2" H
- 1067 lumens 54 lumens/watt (delivered)
- Warm white 3000K lighting color and 90+CRI
- Ideal for Mid-Century and Luxe environments
- Dimmable with most Triac or ELV type dimmers
- Mount on wall in bath and vanity settings to enhance a spa-like atmosphere
- Shop the complete Colonnade LED collection for a coordinated look throughout your bath and vanity areas
- ADA compliant
- Damp location listed
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting plate for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- Meets California Title 24 JA8-2016

### Performance:

Number of Modules	2
Input Power	19w per module
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1067/54.7 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-10 °C
Warranty	5 year limited warranty
Labels	cETLus Damp location listed Meets California Title 24 JA8-2016

## P300186-015-30

### Images:



### Dimensions:

Width: 13-1/4"  
 Depth: 3-7/8"  
 Height: 7-1/2"  
 H/CTR: 3-7/8" (glass facing up)

Glass  
 Width: 2-3/8"  
 Length: 2-3/8"  
 Height: 7-1/2"

**Photometrics:**


## P300186-015-30

<b>ELECTRICAL DATA</b>	<b>P300186-015-30</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.158 A
Input Power	19
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-10 °C to
Dimming	Yes*

\*See Dimming Notes for more information

**P300186-015-30**

LED Light Engine: 3000 K 90 CRI  
 System Wattage: 19  
 Fixture delivered lumens: 1067  
 Fixture Efficacy: 54.7  
 Spacing Criteria: 0.09 | 5.38 | 3.59

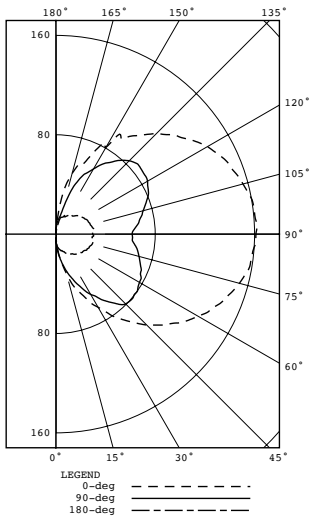

Test 18.00106 Test Date 01/31/18

**CANDELA DISTRIBUTION**

CANDELA	DISTRIBUTION			FLUX		
	0.0	45.0	90.0	135.0	180.0	
0	6	6	6	6	6	
5	8	10	11	10	9	1
15	33	34	29	19	13	8
25	57	56	47	25	16	19
35	81	80	64	30	19	35
45	104	104	79	34	23	54
55	124	125	80	36	26	72
65	140	143	75	37	28	87
75	153	157	69	39	30	98
85	159	165	62	38	29	103
90	161	166	62	39	30	
95	161	165	65	40	30	104
105	156	160	73	39	29	99
115	147	149	82	39	28	90
125	132	132	86	38	24	75
135	115	112	84	36	21	57
145	94	93	70	34	19	39
155	73	68	53	29	16	22
165	50	42	19	12	13	8
175	9	10	7	3	2	1
180	1	1	1	1	1	

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%FIXT
0-30	28	2.9
0-40	64	6.6
0-60	190	19.6
0-90	478	49.1
90-120	292	30.1
90-130	367	37.8
90-150	464	47.7
90-180	494	50.9
0-180	972	100.0

**P300186-015-30****Dimming Notes:**

---

P300186 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

**Dimming Controls**

---

Lutron - DVCL-253P

Lutron - Caseta Wireless

Leviton – 6672

Leviton – 6681

Lutron - AYCL-153P

Lutron - AYLV-600P

Lutron - NTLV-600

Lutron - N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.